

H076 Signage Player

Deliver dynamic content using latest Android 14 signage player. Designed for performance and reliability, it supports dual displays, features RTC power scheduling, and runs fanlessly for quiet operation. Rated for 24/7 use, it's the perfect fit for conference solutions, digital signage, and KIOSK applications.



Android 14



Fanless



RTC Power
Scheduling




Dual 4K 60Hz



Rated for
24/7 Use

Ports

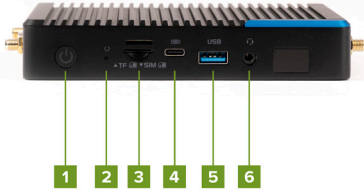


Front IO

- 1.** Power Button
- 2.** Recovery Key
- 3.** MicroSD/SIM Slot
- 4.** USB 3.0 (Type-C)
- 5.** USB 3.0 (Type-A)
- 6.** Line-out/Mic in port

Side IO

- 7.** DB9 RS232

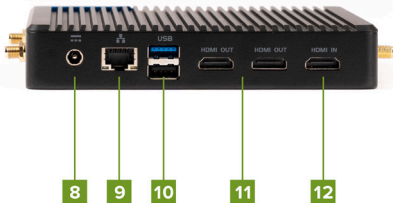

Rear IO

- 8.** DC-In
- 9.** RJ45 with Support POE PD-In 48w
- 10.** USB 2.0 (Type-A)
- 11.** HDMI 2.0
- 12.** HDMI In

ARM

Performance

| | |
|------------------|---|
| Processor | Rockchip RK3576 - Cortex-A72 |
| Memory | 4GB LPDDR4x |
| Storage | 32GB eMMC Supports MicroSD up to 256GB |
| Graphics | Mali-G52 MC3 |
| Operating System | Android 14 |

System

| | |
|--------------|--|
| RTC | Power scheduling supported |
| Power Supply | UK/US/EU Inline Multiplug Adapter (12V 3A 36W, 2.5mm x 5.5mm) |

Physical

| | |
|------------|---|
| In the box | H076 system Power supply 2 x Antenna |
| Dimensions | 151mm x 129mm x 27mm |
| Weight | Gross Weight: 1.19Kg Net Weight: 0.73Kg |
| Packaging | Paper: 167g (80.29%) Plastic: 41g (19.71%) |

Conformity

| | |
|------------|-----------|
| Conformity | CE / RoHS |
|------------|-----------|

Connectivity

| | |
|------------|--|
| Networking | 1Gb LAN Wi-Fi 6 & Bluetooth 5.2 |
| Front IO | 1 x Power Button 1 x Recovery Key 1 x MicroSD/SIM Slot 1 x USB 3.0 (Type-C) 1 x USB 3.0 (Type-A) 1 x Line-out/Mic in port |
| Side IO | 1 x DB9 RS232 |
| Rear IO | 1 x DC-In 1 x RJ45 with Support POE PD-In 48w 2 x USB 2.0 (Type-A) 2 x HDMI 2.0 1 x HDMI In |

Warranty

| | |
|-------------------|--|
| Standard | 1 year collect and return |
| Optional Upgrades | Up to 5 years total cover Extended Service Plan |

Environment

| | |
|--------------------|---------------------------|
| Operating Temp | -5°C to 45°C |
| Operating Humidity | 10% to 90% non-condensing |
| Storage Temp | -20°C to 70°C |
| Storage Humidity | 5% to 95% non-condensing |

Please note that the system images are examples and may differ based on chosen specifications. Some products shown in system images may be subject to availability. Please contact our team if you have any questions regarding configuration.

Supported Resolutions

Supported Resolutions

| Video Format | | | Output | |
|--------------|-------------|-------------------|--------|---------|
| Shorthand | Resolution | Refresh rate (Hz) | HDMI | Mini DP |
| 1080p | 1920 × 1080 | 30 | Yes | No |
| | | 60 | Yes | No |
| 4K | 3840 × 2160 | 30 | Yes | No |
| | | 60 | Yes | No |
| 5K | 5120 × 2880 | 30 | No | No |
| | | 60 | No | No |
| 8K | 7680 × 4320 | 30 | No | No |
| | | 60 | No | No |