

Thinbook 14

Thinbook 14 is a durable, compact, and secure laptop built for all-day use. Ideal for students, teachers, and business users on the go, it features a massive 9-hour battery life to tackle the most demanding days.



All Day
Battery Life



AMD Ryzen 5



USB-C
Dockable




Wi-Fi 6E



Windows
Hello

Ports

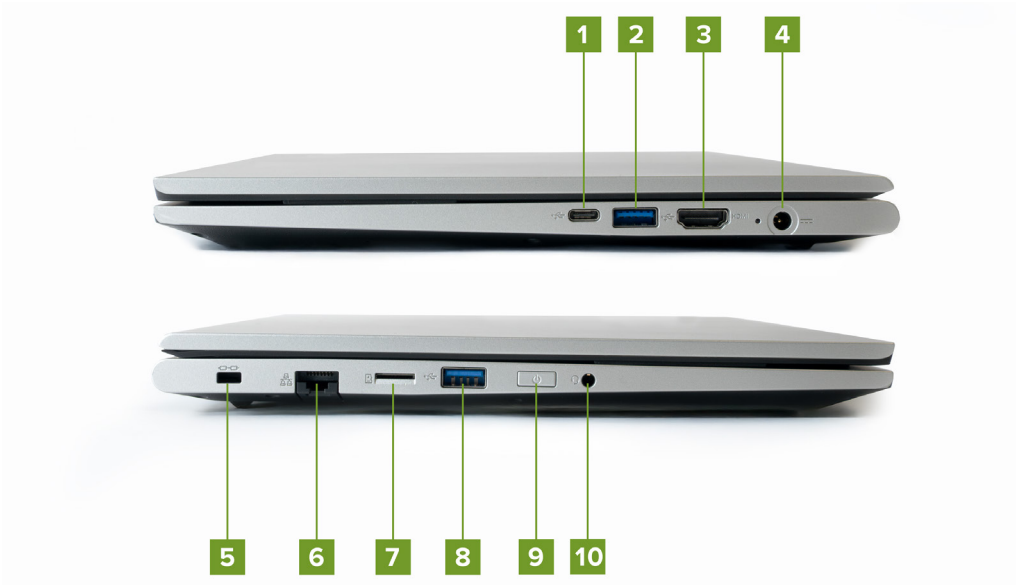

- | | | | |
|----|--|-----|---------------------------------|
| 1. | 1 x USB 3.2 Gen 2 (Type-C) - PD in + DP alt mode | 6. | LAN (RJ45) |
| 2. | USB 3.2 Gen 1 (Type-A) | 7. | MicroSD Reader |
| 3. | HDMI | 8. | USB 3.2 Gen 1 (Type-A) |
| 4. | Power In | 9. | Power button |
| 5. | Kensington Lock | 10. | Audio in/out (3.5mm combo jack) |

AMD Ryzen 7000

Performance

Processor	AMD Ryzen 5 7430U - 6C/12T
Memory	Up to 32GB DDR4 @ 3200MHz
Storage	Up to 4TB M.2 NVMe
Graphics	AMD Radeon Graphics
Operating System	Windows 11 - Home / Pro / Education No operating system - Optional

Display

Resolution	1920 x 1080 @ 60Hz
Size	14" diagonal
Type	WVA
Brightness	250 Nits
Surface	Matte

Physical

In the box	Thinbook 14 Power Brick Power Cable
Dimensions	324.9 x 219.5 x 20.9 mm
Weight	Net Weight: 1.4Kg (Approx) Gross Weight: 2.2Kg (Approx)

Warranty

Standard	1 year collect and return
Optional Upgrades	Up to 5 years total cover Extended Service Plan

Connectivity

Networking	Dual Band Wi-Fi 6E Intel AX210 Bluetooth 5.3
Left IO	1 x USB 3.2 Gen 1 (Type-A) 1 x LAN (RJ45) 1 x MicroSD Reader
Right IO	1 x USB 3.2 Gen 2 (Type-C) - PD in + DP alt mode 1 x USB 3.2 Gen 1 (Type-A) 1 x HDMI

Battery

Battery Life	11 Hours (Idle) 9 Hours (Office Load)
Battery Capacity	50WH
Power Supply	65W Power Adapter

Security

Biometrics	Fingerprint scanner
Security Lock	Kensington
TPM	TPM 2.0
Privacy feature	Webcam privacy cover

System

Webcam	2.0MP FHD with TNR
Keyboard	Backlit UK QWERTY
Audio	HD Audio

Please note that the system images are examples and may differ based on chosen specifications. Some products shown in system images may be subject to availability. Please contact our team if you have any questions regarding configuration.